




LMD-PERF-350
1 lux @ 300m | Width: 60m
Lumen: 6.000 lm
Wattage: 60W
Voltage: 10-30V
Housing: Aluminum
Lens: Polycarbonate
Weight: 1.46 kg
IP Rating: IP67
E-mark Approved:
ECE R10, ECE R65, ECE R148, ECE R149

DIMENSIONS : 247 x 175 x 87 mm

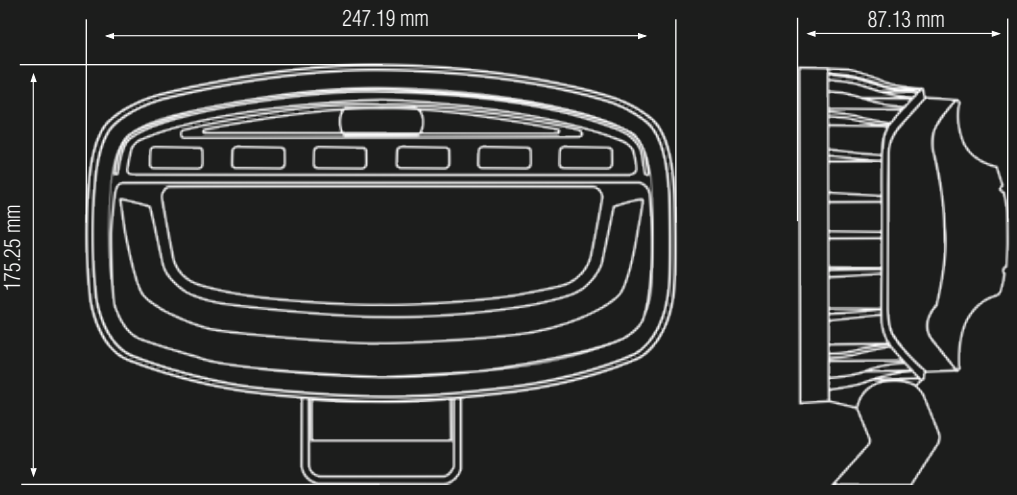

 To conclude the Perceptor Series, here is the latest addition to the family, the model 350. This long-range light will fully satisfy you thanks to its unique combination with a flash light compliant with the ECE R65 standard (4 selectable modes). Its dual-color position light in white or orange, shaped like a smile, gives it a unique design that reflects the happy driver you are! In terms of performance, its eco-friendly 60W wattage provides intense and uniform lighting while adhering to the latest regulations.

 Pour conclure la Série Perceptor, voici le dernier-né de la famille, le modèle 350. Ce longue portée saura pleinement vous satisfaire grâce à sa combinaison unique avec un feu flash conforme à la norme ECE R65 (4 modes sélectionnables). Son feu de position à double couleur blanc ou orange, en forme de sourire, lui confère un design unique qui reflète le chauffeur heureux que vous êtes ! Côté performance, son wattage de 60W éco-responsable offre un éclairage intense et homogène, tout en respectant les dernières normes en vigueur.

TECHNICAL INFORMATION						
ITEM#	LENGTH	BEAM PATTERN	LUMEN	WATTAGE	FLASH FUNCTION	CERTIFICATION
LMD-PERF-350	247 mm	Driving Beam	6.000 lm	60W	Yes	ECE R148, R65, R149, R10
 This item includes: 1 Perceptor Flash, 1 Allen Key, Manual Instructions.  Cet article inclut: 1 Perceptor Flash, 1 Clé Allen, Manuel d'instructions.						

PERCEPTOR FLASH SERIES LED DRIVING LIGHT

E-approved as Driving Light ECE R148, R149, R65, R10.





4 FLASH MODES - WARNING LIGHT
SINGLE FLASH (ECE R65)
DOUBLE FLASH
TRIPLE FLASH
QUINT FLASH
ALTERNATING OR SYNCHRONIZED OPERATIONS
OPÉRATIONS ALTERNÉES OU SYNCHRONISÉES

Housing : Aluminum.
Matériau: Aluminium.

Fully Sealed And Waterproof :
Entièrement scellé et étanche :
IP67

Selectable Position Light :
WHITE or AMBER.
Feu de position sélectionnable :
BLANC ou ORANGE.

Lens : Polycarbonate.



ECE R10 , R65, R148, R149
E-Mark Approved.

Adjustable Bracket : 304 Stainless Steel, Black Coating.
Support réglable : Acier inoxydable 304, revêtement noir.



36

BY LIGHTMOTIVE®

©LUMIDRIVE 2025 | 188/5, rue du Cerf - 1332 Genva - Belgium | info@lumidrive.eu | www.lumidrive.eu | +32 2 652 21 52

37